

Greenduct™

HIGH EFFICIENCY FLEXIBLE DUCT



GREENDUCT™
Reduces energy usage

GREENDUCT™
Reduces green house emissions

GREENDUCT™
Reduces running costs, year after year

GREENDUCT™
Achieves desired home comfort levels faster

GREENDUCT™
Reduces heating / air conditioning unit operating times which prolongs unit life

GREENDUCT™
PROUDLY MADE IN AUSTRALIA


GREENDUCT™
Comes with a 10 Year Warranty as standard

DOUBLE the MANUFACTURERS WARRANTY by using an AUTHORISED GREENDUCT DEALER, turn over for details.

Greenduct is an Award Winning flexible duct, made in Australia, by an Australian owned and operated family business. The reason why Greenduct is so good is the strength of the inner core and the thickness and thermal rating of the insulation it uses.

Greenduct has a steel, mechanically locked core. Greenduct core does not rely on glue to stay stuck together. If the core of flexible duct fails, your heating & / or cooling costs will literally go through the roof.


The marginal additional cost of Greenduct in comparison to the total cost of the entire ducted heating or air conditioning system can be saved again and again over the life of the unit.

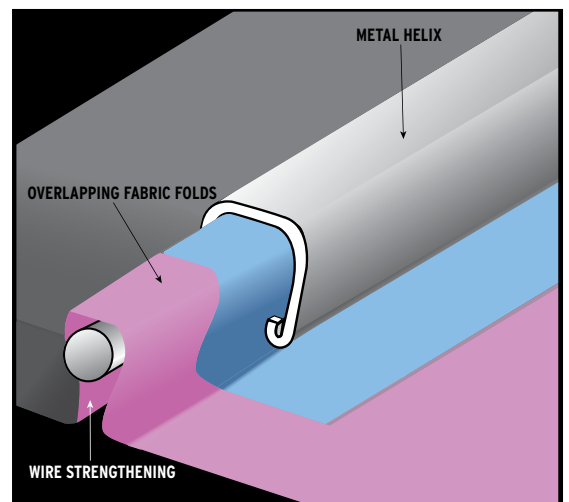

GREENDUCT™ R^M 2.0 - ULTIMATE

Core: Mechanically locked steel “Unilok”
Insulation: Polyester fibre blanket, 120mm thick
Outer Jacket: Tough green poly vapour barrier
INSULATION 120mm*


233% MORE
THERMALLY EFFICIENT THAN
OUR STANDARD R^M 0.6.

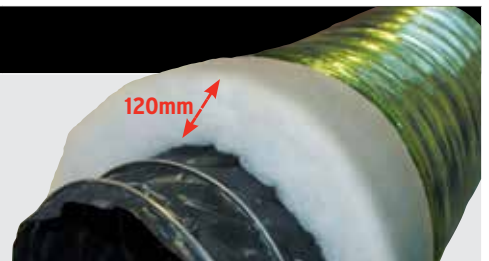

GREENDUCT™ R^M 1.5 - SUPERIOR

Core: Mechanically locked steel “Unilok”
Insulation: Polyester fibre blanket, 90mm thick
Outer Jacket: Tough green poly vapour barrier
INSULATION 90mm*


150% MORE
THERMALLY EFFICIENT THAN
OUR STANDARD R^M 0.6.

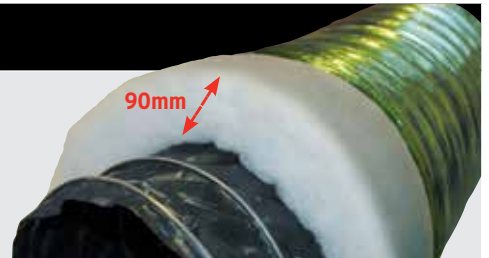

GREENDUCT™ R^M 1.25 - PREMIUM

Core: Mechanically locked steel “Unilok”
Insulation: Polyester fibre blanket, 80mm thick
Outer Jacket: Tough green poly vapour barrier
INSULATION 80mm*

108% MORE
THERMALLY EFFICIENT THAN
OUR STANDARD R^M 0.6.

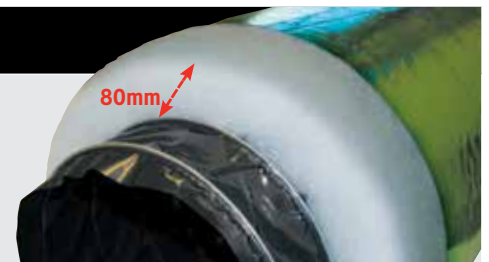

Purchase highest quality, Australian Made Greenduct from an authorised Greenduct Dealer and you get - DOUBLE THE MANUFACTURERS WARRANTY* - from 10 years to 20 YEARS.


Refer to the Westaflex Website for Greenduct Dealer Locations

(*Terms & Conditions Apply)

WESTAFLEX R^M 0.6 - STANDARD

Core: Glued PET with wire
Insulation: Polyester fibre blanket, 60mm thick
Outer Jacket: Silver poly vapour barrier
INSULATION 40mm*


Westaflex Standard R^M 0.6
Entry Trade Level
FLEXIBLE DUCT

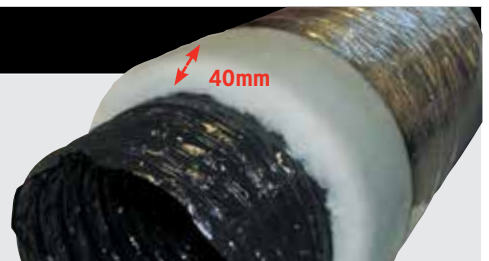

IMPORTED TRADE GLUED DUCT R^M 0.33 - IMPORT

Core: Glued PET with wire
Insulation: Polyester fibre blanket, approx. 20mm thick
Outer Jacket: Silver poly vapour barrier
INSULATION 20mm*

TYPICAL IMPORTED
BUILDER LEVEL
FLEXIBLE DUCT

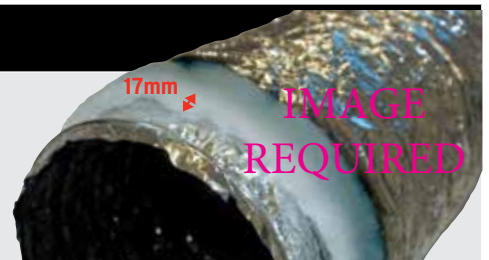

** Insulation thickness correct at time of production or measuring. Thickness can be varied due to fibre type and packaging / shipping methods. Thermal ratings provided by Autex Pty Ltd

GREENDUCT™
Has been tested to and / or
complies with the following
standards

Australian Standard	Complies
Australian Standard (AS)-4254	Yes
Australian Standard (AS)-4859.1	Yes
Australian Standard (AS)-1530.3	Yes



For your nearest
Westaflex / Uniflex outlet email
 sales@westaflex.com.au
 or visit **www.westaflex.com.au**

